


SSR200 | Stainless Steel Miniature Regulator

Specification and ordering

Symbol



Features

1. For high pressure use, corrosion and chemical resistance.
2. Good performance in chemically working environments and outdoor facility.
3. Suitable for semi-conductor industry.
4. Accurate and sensitive pressure setting.
5. Light weight, compact size for space saving.
6. CE and EX-proof certified.



II 2G Ex h IIC T4 Gb
II 2D Ex h IIC T135°C Db
-10 °C ≤ Ta ≤ 70 °C



How to order

SSR200	—	02	N
Stainless Steel SUS316 Miniature		Port size	Thread
Miniature Regulator		02 : 1/4"	Blank : G N : NPT R : Rc

Please contact our sales for non-relieving type.


*For non-relieving type, the secondary pressure is not allowed to be exhausted when it is higher than setting pressure.

Specifications

Model	SSR200
Port size	1/4"
Fluid	Compressed air
Regulator construction	Piston
Body material	Stainless steel SUS316
Pressure gauge material	Case: Stainless steel SUS304, Thread: Stainless steel SUS316
Operating pressure range	0 ~ 20 kgf/cm ²
Max. inlet pressure	30 kgf/cm ²
Max. flow rate l/min (ANR)	1850
Ambient temperature	-10°C ~ 70°C
Proof pressure	40 kgf/cm ²
Net weight	1200g
Accessories	Pressure gauge (0~10kg), Plug, Mounting bracket set
Option	Pressure gauge (0~20kg)

Dimensions

SSR200-02

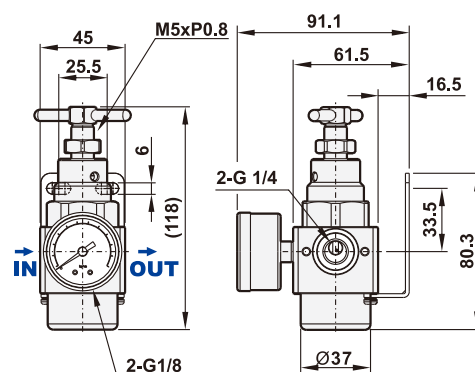

Confirm the selected model, operating conditions and options with Fluidline before ordering.